
CBI243A ALL In One




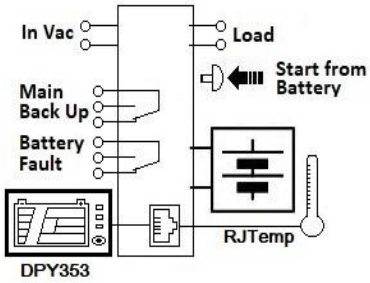

Input: Single-phase 115 – 277 Vac
Output Load: power supply 24 Vdc; 3 A
Output Battery: charging 24 Vdc; 3 A
Suited for the following battery types: Open Lead Acid, Sealed Lead Acid, Lead Gel, Li-Ion and Ni-Cd
Automatic diagnostic of battery status. Charging curve IUoU, constant voltage and constant current Battery Life Test function (Battery Care)
Switching technology, output voltage 22-28.8Vdc Three charging levels: Boost, Float and Recovery
Protected against short circuit and inverted polarity
Signal output (contact free) for discharged or damaged battery
Signal output (contact free) for mains or Back-UP
Protection degree IP20 - DIN rail; Space saving

Technical features

Thanks to the All In One units (DC-UPS), it will be possible to optimize power management. The available power is automatically allocated between load and battery, supplying power to the load is the first priority of the unit thus it is not necessary to double the power, because also the power going to the battery will go to the load if the load so requires. The maximum available current on the load output is 2 times the value of the device rated current In. We call "Battery Care" the concept base on algorithms that implement rapid and automatic charging, battery charge optimization during time, flat batteries recovery and real time diagnostic during installation and operation. The Real Time Auto-diagnostic system, monitoring battery faults such as, battery Sulfated, elements in short circuit, accidental reverse polarity connection, disconnection of the battery, they can easily be detected and removed by help of Blink Code of Diagnosis Led; during the installation and after sell. The continuous monitoring of battery efficiency reduces battery damage risk and allows a safe operation in permanent connection. Each device is suited for all battery types by means of jumpers it is possible setting predefined curves for Open Lead Acid, Sealed Lead Acid, Gel, Ni-Cd (option). They are programmed for two charging levels, boost and charge, but they can be changed to single charging level by the user. A rugged casing with bracket for DIN rail mounting provides IP20 protection degree. They are extremely compact and cost-effective.

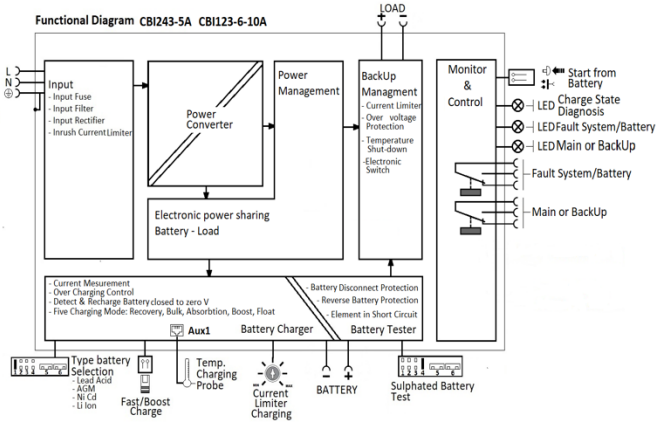

Norms and Certifications

In Conformity to: EN60950 / UL60950-1 and CSA C22.2 No. 60950-1-07 (Information Technology Equipment) – Safety – Part1: General Requirement. Electrical safety; Electrical safety: EN54-4 and EN12101-10; 89/336/EEC EMC Directive; 2014/35/UE (Low Voltage); Safety EN IEC 62368-1: 2014/AC:2015; DIN41773 (Charging cycle); Emission: IEC 61000-6-3; Immunity: IEC 61000-6-2. CE.

Climatic Data

Ambient temperature (operation)	**-25 ÷ +70°C**
De Rating T^a > 50°C	**- 2.5%(In) / °C**
Ambient temperature Storage	**-40 ÷ +85°C**
Humidity at 25 °C no condensation	**95% to 25°C**
Altitude: 0 to 2 000m - 0 to 6 560ft	**No restrictions**
Altitude: 2 000 to 6 000m - 6 560 to 20 000ft	**De-rating 5°C/1000m**
Cooling	**Auto convention**

General Data

Input Data

Nominal Input Voltage Vac	**115 – 230– 277**
Voltage range Vac	**90 ÷ 305**
Inrush Current (Vn – In nom. Load) I^2t	**≤ 11 A ≤ 5 msec.**
Frequency	**47 ÷ 63 Hz**
Power Factor typ. (115 – 230 Vac)	**0.58 – 0.48**
Input Inrush Current Limiter	**NTC**
Input Current (115 – 230 – 277 Vac) Max	**2.8- 1.7 - 1.3 A**
Internal fuse (not replaceable)	**4 A**
External Fuse (recommended) MCB curve B	**10 A**

Output Data (internal power supply)

Output Voltage (Vn) / Nominal Current (I_n)	**24 Vdc / 3A**
Output Current I_n = Iload	**3 A**
Efficiency (at 50% of rated current)	**≥ 90 %**
Ripple and Noise (20 MHz Bandwidth)	**80 mV_{pp} (max)**
Turn-On delay after applying mains voltage	**1 sec. (max)**
Start up with Strong Load (capacitive load)	**Yes, Unlimited**
Dissipation power load max (W)	**13**
Current Short Circuit Icc. Max 2 sec.: Hiccup mode 60°C. Restart automatically.	**In x 3.5**
Over Load protection	**Yes**
Over Voltage Output protection	**Yes (typ. 35 Vdc)**
Overheating Thermal protection	**Yes**

Battery Output

Output Voltage Battery	**Follow the Out Load**
Boost-Fast charge Jumper Configuration 25°C (V/cell). Jumper Configuration battery type	**Lead Acid: 2.4 NiCd:1.51; Li-ion: 3.65**
Float Charge Jumper Configuration 25°C (V/cell) Jumper Configuration battery type	**Lead Acid: 2.23; 2.25;2.27;2.3 NiCd:1.4; Li-ion: 3.45**
Max.Time Boost–Bulk charge (Typ. at IN)	**15 h**
Min.Time Boost–Bulk charge (Typ. at IN)	**1 min.**
Recovery Charge	**2 – 20 Vdc**
Charging current max I_{batt}	**3 A ± 5%**
Charging current limiting I_{adj}	**10 ÷ 100 % / I_{bat}**
Reverse battery protection	**Yes**
Sulfated battery check	**Yes by Jumper**
Short circuit Element Detection	**Yes**
Detection of element in short circuit	**Yes**
Quiescent Current max.	**≤ 100 mA**
Charging Curve automatic: IUoU	**4 stage**
Remote Input Control (RTCONN cable)	**Boost / Float**

[1]Can be adjusted via PC software mode

Load Output			
Output voltage Vdc (at I_n)	**22 - 28.8 V (31 Ni-Cd)**		
Nominal current I_{load}	**1.1 x I_n A ± 5%**		
Continuous current (Without battery) $I_{load=} I_n$	**3 A**		
Continuous current (With battery) $I_{load=} I_n + I_{batt}$	**6 A**		
Max. current Output Load (Main) $I_{load =} I_n + I_{batt\ (4\ sec.)}$	**9 A max.**		
Max. current Output Load (Back Up)$I_{load =} I_n + I_{batt\ (4\ sec.)}$	**6 A max.**		
Start From Battery Without Main (Remote Input Control)	**RTCONN (cable) Push Button**		
Time Buffering; min (switch output off without main input)	**∞: standard 5 min.: Require SW**		
Threshold alarm Battery almost flat	**21 – 22 Vdc batt**		
LVD. (Protections against total Battery discharge)	**19 – 20 Vdc batt**		
Signal Output (free switch contacts)			
Main or Backup Input Power	**Yes**		
Low Battery	**Yes**		
Fault Battery or system	**Yes**		
Type of Signal Output Contact			
Dry Contact. Current can be switched (EN60947.4.1): Max: DC1: 30 Vdc 1 A; AC1: 60 Vac 1A (Resistive load) Min: 1mA at 5 Vdc (Min permissive load)			
Fault System / Low Battery	**C**	**NC**	**NO**
Main or Back Up	**C**	**NC**	**NO**
Signal Input / Output (RJ45)			
Temp. Comp. Battery (with external probe): Aux Out	**RJ Temp (cable)**		
Remote monitoring LED from Front Device: Aux Out	**RJ 45 (cable)**		

Accessory	
RTCONN	**Cable Start from battery Length 1m. Jumper 6**
RJTEMP451	**Temperature Probe Length 1m.**
RJTEMP453	**Temperature Probe Length 3m.**
RJ45COUPLER	**RJ45 Three way "Daisy Chain" for Aux 2**
DPY353	**Display for: Monitoring the Battery state, Battery Charging Section.**

[1]Can be adjusted via PC software mode