

DPA248

2 Outputs (one with AS-Interface data decoupling)

DIN Rail Power Supply, 240 Watt



- ◆ High efficiency: 88%
- ◆ ACin 115/230V manual switch
- ◆ WxHxD = 120x134x120mm
- ◆ Integrated data decoupling
- ◆ Meets EMV standards: EN 50081-1, EN 50082-2, NAMUR, EN 61000-4, VDE 0160/2
- ◆ Design meets VDE 0551
- ◆ Both outputs with double terminals



Preliminary data sheet

Power Supply DPA248

The DPA248 is a very compact power supply designed for fieldbus applications in which power and data share the same twisted-pair.

The unit supplies power, decouples data from the power supply, and makes the two cables symmetrical with respect to the shield terminal. The decoupling allows the use of unshielded cables.

The PELV output circuit has electronic protection against overload and short-circuit. Isolation is equivalent to safety transformers as specified in VDE 0551.


Additional to the AS-Interface-output the unit has an independent second SELV-output with 26V and 6A.

Vout	Iout	Pout	Features	Order-No.
Vout1	30.55V	2.8A	85W AS-Interface data decoupling	DPA248.141
Vout2	26.0V	6A	155W OVP	

Warranty: 2 years from date of delivery.

See the web for current data sheet version: www.puls-power.de

Schematic

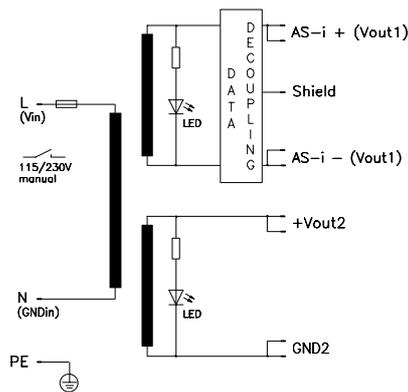

Output


Voltage Vout1	30.55V	Fixed.
Vout2	26.0V	Fixed.
Accuracy	max. ± 3%	includes: production-adjustment, line regulation, and load regulation.
Minimum load	None	Not necessary.
Output power Pout	max. 240W	Mounting side by side possible.
Noise, Ripple	max. 50mVpp	0...20MHz, constant current or R-load.
Modulation voltage	max. 5.6Vrms	Analogous 16Vpp sine.
Over-voltage protection	typ. 29V	Threshold accuracy ± 4%, Vout2 only.
Derating	5W/K	+60° bis +70°C Ta.
Operating indicator	2 green LEDs	On the front.
Output circuit	PELV	VDE 0106 (Vout1).
	SELV	EN 60 950 (Vout2).
Safety		VDE 0106, EN 60 950, VDE 0805.
All outputs are protected against open-circuit, short-circuit, and overload.		

Input

Mechanical:	Al/Mg alloy housing, snap-on mounting for DIN rail TS35/7.5 (EN 55022), WxHxD = 120 x 134 x 120mm, the depth includes the DIN-rail mounting, see page 4.	Line input 1	100...127V AC	Switch position 115V.
Weight:	App. 1150g	· Range	88...132V AC	Full spec.
Screw terminals:	Input 1 terminal, max. 2.5/4mm ² Output 2 terminals, each max. 2.5/4mm ² , see page 4	Line input 2	80...150V AC	Derated, see page 2.
		· Range	220...240V AC	Switch position 230V.
			187...264V AC	Full spec.
			150...300V AC	Derated, see page 2.
		Line frequency	47...63Hz	DC or 400Hz, see page 2.
		Input current	max. 6.0Aeff. / 2.8Aeff.	@ 115 / 230V AC.
		Noise suppression	EN 55 022/B	

DPA248 ♦ 2 Outputs ♦ DIN Rail Power Supply ♦ 240 Watt

Output (continued)				Vout1	Vout2	
Voltage regulation:						
· Line regulation		max.	%	± 0.2	≈ 0.2	88...132V AC / 187...264V AC, Pout = 240W. Iout = 50%, Δ Iout = ± 40%.
· Load regulation stat.	Δ Ustat	max.	%	± 0.5	≈ 0.5	
· Temperature coefficient		typ.	%/K	± 0.02	≈ 0.02	
Ripple		max.	mVpp	50	50	0...20MHz, @ ACnom, Iout = 100%, R or I-load.
Current limitation						
· Threshold		min/max.	A	3.0 / 5.0	11.0 / 14.0	Fixed, 29V Z-load (Vout1), 24V Z-load (Vout2), values for Vout2 are valid when Vout1 is in open-circuit.
· Characteristic				See graph on page 3		
· Short-circuit				6	25	Pulsating at Vout2.
Start delay	tDelay	typ.	s	1		After switch on.
Vout rise-up time	tRise	typ.	ms	350		Load 2.8A and C-load 15mF.



Input (continued)						
AC input range 1 / 2			V AC	88...132 / 187...264		Full spec.
DC input range			V DC	250...300		Full spec.
Derated AC range 1 / 2			V AC	80...88 / 150...187, 150 / 300 for 0.5s		Power derating typ. 20%.
Derated DC range			V DC	200...250		Full spec, but air- and leakage distances not longer than stated in VDE 0805.
			V DC	300...370		
Frequency range			Hz	47...63		Full spec.
Derated frequency range			Hz	63...400		Increased leakage currents.
In-rush current		max.	A	50		@ cold-start and 264V AC, NAMUR standard met (Ta = 25° C).
Hold-up time		min.	ms	20		@ 187V AC, Pout = 240W.
Power factor λ		typ.		0.6		@ 88V AC, Pout = 244W.
Internal fuse				5x20mm T8A/250V (IEC127/2-5)		To replace, see page 4.
Input range selection				Manual (230V AC set at factory)		115/230V switch, position see page 4

Data Decoupling / Earth Symmetrization


Output inductance	100μH ± 10%	According to AS-Interface-specifications
Terminating impedance	2 x 39Ω ± 1%	Measured between AS-i+ and AS-i-.
Symmetry tolerance	± 1%	As above.
Electric strength	500V	AS-i+ / AS-i- to shield.
		As above.

Electromagnetic Compatibility


Emissions according to EN 50081-1		EN 50081-2 is also satisfied.
· Radio interference, EN 55011, EN 55022	Class B	
Immunity according to EN 50082-2	No degradation of performance	EN 50082-1 is also satisfied.
· Electrostatic discharge ESD	8kV direct discharge (level 4)	
EN 61000-4-2	15kV air discharge (level 4)	
· Radiated fields, EN 61000-4-3	10V/m (level 3)	80MHz...1000MHz, ACin and Vout lines: l = 1m.
· Fast transients, EN 61000-4-4	4kV (level 4)	Coupled to ACin line.
	2kV (level 3)	Coupled to DCout line.
· Surge transients EN 61000-4-5	4kV (isolation class 4)	Common mode, unit on.
	2kV (isolation class 4)	Differential mode, unit on.
	10V (level 3)	150kHz...80MHz.
· Conducted disturb., EN 61000-4-6		
Immunity according to further standards		
· Transient voltage, IEC 255	5kV	Common mode, unit off.
· NAMUR-prescription	Satisfied	
· Transient resistance, VDE 0160 §5.3.1.1.2	750V / 1.3ms (class 2)	Valid for total load range.
· Over-voltage resistance (PULS standard)	150 / 300V AC / 0.5s	Switch position 115 / 230V AC.

2 Outputs ♦ DIN Rail Power Supply ♦ 240 Watt ♦ DPA248


Typ. Output Characteristic Vout1

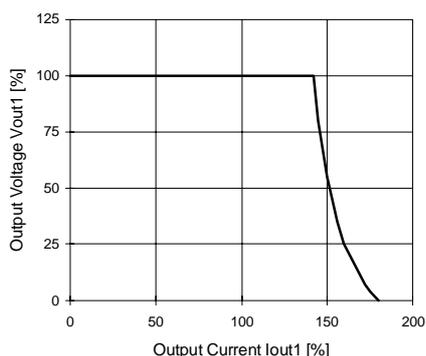

Typ. Output Characteristic Vout2

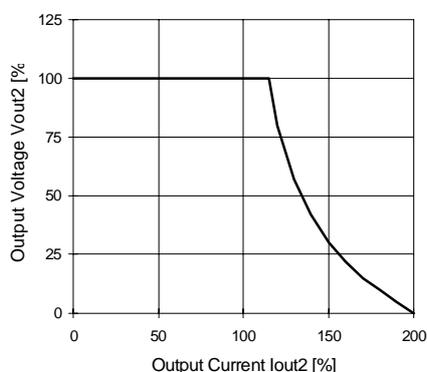

Typ. Derating over Temperature

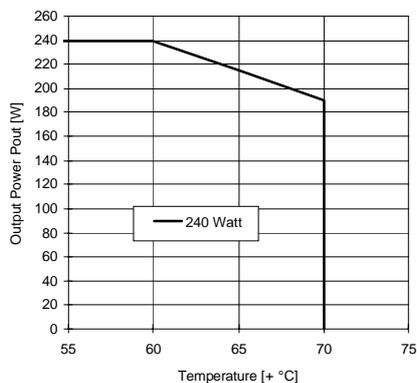

Protection

Unit protection		
· Overload	Yes	See current limit.
· Short-circuit proof	Yes	Automatic voltage recovery.
· Open-circuit proof	Yes	
· Over-temperature (OTP)	—	
· Reverse battery prot.	Yes	
· ACin range selection	Manual	Switch for 115/230V AC.
Load protection		
· Over-voltage (OVP)	Yes	
Threshold	typ. 29V	
Accuracy	max. ± 4%	
Method	—	Independent second regulator.

Safety

Electrical safety		
· Test voltage according to EN 60 950 for t = 2sec	3kV AC 2.5kV AC 500V AC	Primary / secondary. Primary / PE. Secondary / PE.
· Air- and leakage distance	6.4 / 8mm 4mm	Primary / secondary. Primary / PE.
· Isolation resistance	min. 5MΩ	VDE 0551.
· Protection class	I	VDE 0106 part 1, IEC 536.
· PE resistance	< 0.1Ω	VDE 0805.
· Protection system	IP20	DIN 40050, IEC 529.
· Leakage current	max. 0.75mA	EN 60 950 (50Hz frequency line).
· Output circuit	PELV SELV	VDE 0160. EN 60 950.
· Over-voltage class	II	VDE 0110 part 1, IEC 664.
Touch safety	Finger test	VDE 0100 §6, EN 60 950, VBG4.
Penetration protection	> Ø 3mm	e.g. screws, small parts etc.

Operation and Ambient Area

Application class		
Operation temperature	max. -10° ... +70°C	DIN 40040. Ta (measured at 1cm distance).
· Derated range	+60° ... +70°C	Derating, see diagram.
Storage temperature	typ. -20° ... +100°C	Ta.
Humidity	max. 95%	Non-condensing.
Mechanical usage	Vertical	See page 4.
· Lateral spacing	None	No gap needed.
Cooling	Normal convection	Don't obstruct air flow.
Dirt protection level	max. 2	VDE 0110 part 1.
Vibration	0.075mm	IEC 68-2-6 (10...60Hz).
Shock	11 ms / 15g	IEC 68-2-27 (3 shocks).
Operation height	max. 2,000m	Above sea level.

Efficiency

100% load	typ. 88%	@ 230V ACin.
-----------	----------	--------------

Reliability and Lifetime

MTBF according to Siemens standard SN29500		
	typ. 200,000h	230VAC, Iout = 100%, +40°C Ta.
Only long life (> 2,000h @105° C) electrolytic capacitors are used.		
Function test	100%	Test certificate enclosed.
Run-in (burn-in)	24h	Full load, Ta = +60° C, on/off cycle.

PULS Munich

Tel.: 089 / 92 78-2 44
Page 3 / DPA248_19.Feb.01

This technical information is valid for +25° C ambient temperature and 5 min. run in time, unless otherwise stated.

DPA248 ♦ 2 Outputs ♦ DIN Rail Power Supply ♦ 240 Watt

Fuse

The PSU has electronic protection against external short-circuits. In case of an internal defect, a fuse disconnects the unit. It can only be replaced by opening the unit which should be done by the supplier.

Installation for Operating

Install DIN rail TS35/7.5 horizontally, ensuring correct orientation.

For other installation considerations consult your representative. Ensure free air flow.

Dimensions and Connections

Fully enclosed Al/Mg alloy housing. All mechanical dimensions are in mm.

1) Do not remove PE screws.

The shield terminal should be connected to earth or to the shield of the load cable.

Screw terminals:

On the front side. These accept wire of up to 4mm² cross section (single-core cable) or 2.5mm² cross section (multi-core flex).

Remove 9 to 15mm of insulation from wire.

Take care of standards which must be satisfied, e.g. VDE 0100 or EN 60 950.

Caution:

Do not remove any screws on box, as internal safety connections could be disconnected!

Operation without AS-Interface

When operating without AS-Interface (e.g. in a lab. test) you should connect a 470µF capacitor between AS-i + and AS-i -, because commercial lab-loads often tend to oscillate. They may resonate with the data decoupling, and the oscillations may exceed the permitted modulation voltage.

Modifications (contact supplier)

Other output voltages, OEM-versions.

Schematic

